

# WPT Field Probe

## Mobile frequency bands




- Specific mobile frequencies probe
- Isotropic & True RMS measurement
- Best sensitivity starting at 0.04 V/m
- High interband attenuation



### Telecommunications

The WPT probe allows measurement of the electromagnetic field only within the mobile telephone spectrum, ignoring all other sources of radiation.

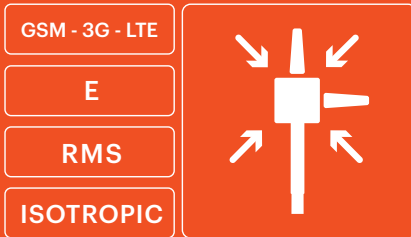

## Technical Specifications

Frequency bands	700-900, 1800-1900, 2100 and 2600
Sensor type	Isotropic, True RMS
Measurement range	0.04 - 65 V/m (RMS)
Dynamic range	> 64 dB
Sensitivity	0.04 V/m
Resolution	0.07 dB
Interband attenuation	> 20 dB (1100 MHz) > 5 dB (2300 MHz)
Frequency response	± 3.3 dB
Linearity	< ± 0.4 dB (0.2 - 50 V/m)
Isotropic deviation	< ± 1.7 dB
Calibration period	24 months (recommended)
Calibration	ISO 17025 accredited (ILAC)
Operating temperature	- 30°C to + 80°C
Temperature response	± 0.8 dB (- 20°C to 60°C)
Dimensions	28.5 x 10.5 x 10.5 cm
Weight	140 g

Compatible with **SMP2**, **MonitEM**, **MapEM**

Product specifications and descriptions in this document subject to change without notice



**ISI sa-nv Instrumentation for Science and Industry**

Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81

(INTERCONTINENTAL SERVICES INC)

Fax 343 12 05 mail : [sales@isi-be.eu](mailto:sales@isi-be.eu) web : [www.isi-be.eu](http://www.isi-be.eu)