

SW-715 HARDENED INDUSTRIAL 5 PORT GIGABIT ETHERNET SWITCH

- 5 Gigabit Ethernet ports
- Wide voltage input range: +5V to +30V
 DC can be powered by a variety of sources
- Industrial temperature range: -40°C to +80°C/-40°F to +176°F - works in extreme conditions
- Redundant dual power inputs reduces risk of power outage
- · Hardened metal case
- Integral DIN mount


















+5 to +30 Volt power input enables the device to be run from a standard car battery ideal for in vehicle applications



Tough metal casing with removable numbered power terminal for easy wiring



Integral DIN mount and slim design takes up minimal cabinet space































SW-715

HARDENED INDUSTRIAL 5 PORT GIGABIT ETHERNET SWITCH

No software needed: Simply plug in any ethernet cable

All Ethernet ports are Auto MDI/MDIX supporting straight through or crossover Ethernet cables

Integral DIN mount with ground

Automatic detection of data transmission speed: 10 or 100 or 1000 Mbps

Easy Wire Removable screw terminal block



-40°C to +80°C/-40°F to +176°F temperature range

Tough metal case

Compact case - all round small profile

Power consumption is optimised based on the status of the link device

Dual redundant power input: +5VDC to +30VDC

Connectors		
Screw Terminals	3.5mm pitch, #22 - #14, 0.5mm ² -2.5mm ² pin power supply	
Wire Thickness	0.150 inch, 3.81mm, 20 pins, 12+8 screw terminals, #26 - #16 AWG, 0.14mm ² -1.3mm ²	
Power Supply		
Power Consumption	3.6W Max: 720mA@+5VDC/120mA@+30VDC	
Power Supply input	Unregulated +5V to +30Volts DC, reverse polarity protection	
Isolation	1500VRMS magr	netic isolation from Ethernet
Environmental		
Operating Temperature	-40°C to +80°C/-	40°F to +176°F
Storage Temperature	-40°C to +80°C/-40°F to +176°F	
Ambient Relative Humidity	5 to 95% (non-condensing)	
Magjack LED Information		
Link/Activity LED	Solid green	Connection established
	Flashing Green	Data communication
Speed LED	Yellow	1Gbs
	Green Both	100Mbs 10Mbs
Ethernet		
Ethernet Port	$5 \times RJ45$ jack, $10/100/1000Mbs$ autosensing, crossover auto sensing (Auto MDIX)	
Protection	1,500 Volts magnetic isolation between ports	
Housing	IP-20 rated metal case	








SW-715

HARDENED INDUSTRIAL 5 PORT GIGABIT ETHERNET SWITCH

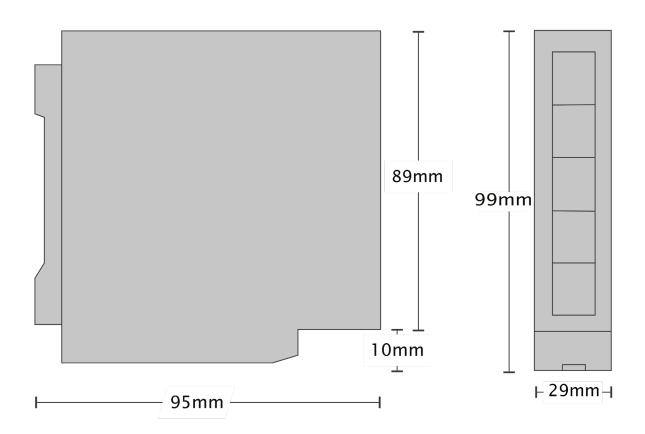

Power Terminal Pin Outs

PIN	FUNCTION
1	-V
2	+VA
3	+VB
4	-v
5	Functional Earth

Ethernet Ports x5 Pin Outs

PIN	FUNCTION
1	TxRxA+
2	TxRxA-
3	TxRxB+
4	TxRxC+
5	TxRxC-
6	TxRxB-
7	TxRxD+
8	TxRxD-

Lifetime Warranty and Support:

We can help with every aspect of your project, from getting you up and running to custom application.







SW-715

HARDENED INDUSTRIAL 5 PORT GIGABIT ETHERNET SWITCH

Packaging Information

Packaging Quick Start Guide

Device Ethernet Switch 5 port

Packaged Weight 0.338 kg, 11.92 ounces

Packaged Dims 160x135x49 mm, 6.3x5.3x1.9 inches

GTIN Universal Code 837324004298

Approvals

Industry Approvals Microsoft Certified Gold Partner, WEEE, RoHS, AEO (C-TPAT), CE, METL

Complies with UL 60950-1

Product Support

Warranty Lifetime - online registration required

Support Lifetime web, email and phone support from fully qualified, friendly staff

who work in and alongside the Product Development Team

Additional Information

OEM option Available for bulk buy OEM

Made In Manufactured in Great Britain (GB) by Brainboxes - Winner 2005 European

Electronics Industry Awards 'Manufacturer of the Year'

Customisable Brainboxes operate a 'Perfect Fit Custom Design' policy for volume users

More info:sales@brainboxes.com



PW-600

Power supply with connectors for UK, USA, EU and AUS mains socket. 'Tails' are suitable for connecting to screw terminal blocks.



PW-650

Power supply with USB connector and prewired screw terminal block. Suitable for use with 5V USB ports.



SW Range

Switch products available in a range of formats and specifications.

www.brainboxes.com





Rue du Doyenné 3, Dekenijstraat / 1180 Brussels – Belgium Tel: +32 2 343 30 81 - email: sales@isi-be.eu - Web: hse.isi-be.eu

