


WPF8 Field Probe

100 kHz - 8 GHz



- High sensitivity from 0.3 V/m
- Isotropic and RMS measurement
- Excellent attenuation at 50/60 Hz
- Meets international standards

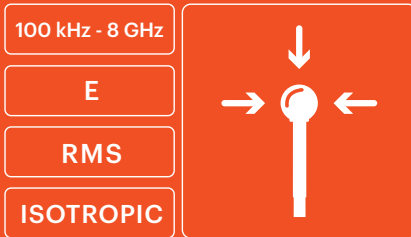

Telecommunications: certification and audit of telecommunication services (GSM, 3G, LTE, TDT, AM, FM, WiFi, etc.).



Industry: assessment of industrial processes for worker's exposure protection.



Defence: assessment of military sites and personnel exposure protection.



Labs/R&D: RF exposure protection of R&D and labs personnel.



Technical Specifications

	WPF8	WPF8-HP High Power version
Frequency range	100 kHz - 8 GHz	
Sensor type	Isotropic RMS diode technology	
Type of frequency response	Flat	
Measurement range	0.3 - 130 V/m (CW) 0.3 - 20 V/m (RMS)	0.3 - 1000 V/m (CW)
Dynamic range	52 dB	70 dB
Sensitivity	0.3 V/m	
Resolution	< 5 %	
Frequency response	± 1.5 dB (250 kHz - 6 GHz) + 0.5 / - 2.5 dB (6.5 GHz - 8 GHz) - 3 dB (100 kHz)	
Linearity	± 0.5 dB (0.5 V/m - 100 V/m)	
Isotropic deviation	± 1.2 dB (@ 2 GHz)	
Calibration	ISO 17025 accredited (ILAC)	
Calibration period	24 months (recommended)	
Temperature range	- 20 °C to 50 °C	
Temperature response	+ 0.1/ - 1 dB (related to 20 °C)	
Dimensions	28.4 cm x 6 cm Ø	
Weight	95 g	
Attenuation at 50/60 Hz	> 80 dB	

(*) The frequency response can be corrected with the SMP2 by using the correction factors stored in the probe (ISO 17025 accredited calibration).

Compatible with **SMP2**, **MonitEM**, **MapEM**

Product specifications and descriptions in this document subject to change without notice



WPF8_EN_1703_v11



ISI sa-nv Instrumentation for Science and Industry

(INTERCONTINENTAL SERVICES INC)

Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81 Fax 343 12 05 mail : sales@isi-be.eu web : www.isi-be.eu