

LCB 30

Portable calibration bath, with a temperature range - 35°C ... 165°C */ 31°F...329°F*. It offers a depth of immersion of 190 mm and a diameter of 60 mm, which allows a high working range. Leyro laboratory baths offer the best performance for the most demanding accurate calibrations. Thanks to the adjustable magnetic stirrer with potentiometer, it can homogenize the calibration area, which makes it one of the most reliable equipment thanks to its high stability of $\pm 0.03^{\circ}\text{C}$ and a better uniformity $\pm 0.05^{\circ}\text{C}$.



APPLICATIONS

Calibration Laboratories
Testing Labs
Universities / R & D
Chemical / Pharmaceutical Industry
Food industry
Maintenance Service

HIGHLIGHTS

Fast Response Time
Temperature range -35 ... 165°C*
External Reference Temperature
Immersion Depth: 190 mm
Resolution: 0,1/0,01/ 0,001°C
Stability: 0,03°C
Accuracy: 0,3°C
Uniformity: 0,05°C
Portable
3 Years Warranty

General information

Easy and intuitive temperature controller with 4 digits and a resolution of 0,1
Integrated PT 100 probe for reference temperature measurements
Adjustable speed magnetic stirrer by potentiometer
High temperature stability up to $\pm 0.03^{\circ}\text{C}$
Temperature uniformity better than $\pm 0.05^{\circ}\text{C}$
Temperature chamber with basket for temperature sensors to be calibrated.




Technical data

Operating temperature range (°C)	-35 ... 165 °C* / 31°F...329°F*
Accuracy	±0.1°C
Temperature stability (°C)	±0.03 °C
Uniformity	± 0.05°C
Resolution	±0.1°C
Well Diameter	60 mm
Immersion depth	190 mm
Well capacity	0.7 liters
Warm-up time	0 to 100°C: 15 Minutes
Cooling time	25 to -25°C: 35 Minutes
Housing and assembly	Desktop / portable
Dimensions An x La x Al (cm)	280 x 280 x 400
Weight (kg)	12.8 kg
Power	310 W
Supply	100 ... 234 Vac 50/60 Hz

It is recommended to use 10 Cst silicone oil

*The minimum temperature is 55 ° C /125,6°F below ambient, Absolute minimum -35 °C /-31°F

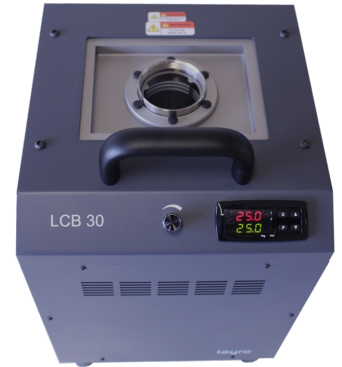

Scope of delivery

Basic instrument LBC 30
 Teflon magnetic stirrer; basket; 1,5 m power cord cable and metal lid
 Drain Pump
 Traceable Certificate 3.1 (5 Points of calibration)
 English manual

Optional

omuni tions RS
 Magnetic stirrer
 Methacrylate lid with 6 inserts.
 Trolley transport case with wheels and handle.
 ENAC / ISO 17025 calibration certificate

